
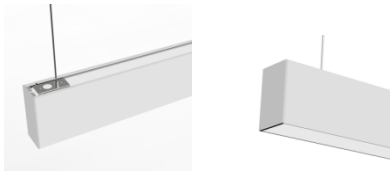


Specification

LED Linear Light-Down (A Series)

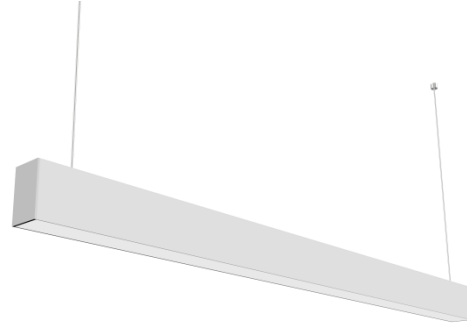


NOTES:

1. This specification for our regular product specifications.
2. The right of final interpretation of this specification to International Building Supply Corporation




1. Descriptions

- ◆ LED Linear Light
- ◆ Ideal replacement of fluorescent fixtures
- ◆ Perfect to apply in: Supermarkets, Meeting rooms, Offices, Hospital, Warehouse, Hotels, Retail stores, etc

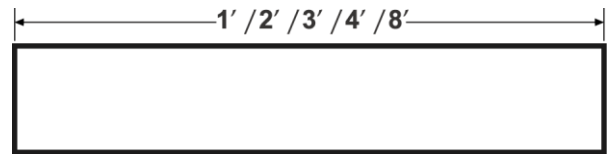

2. Characteristics

- ◆ Stylish and Unique design
- ◆ Multiple connecting methods with “+”、“T”、“L” hardware,
Max connection 550W @120V, 1000W @277V
- ◆ Modularized design, easy to maintain and replace
- ◆ Motion sensor, BBU optional
- ◆ CRI > 80, CRI>90 optional
- ◆ Matt white and matt black option



3. Applications





4. Technical Parameters

| Code | IBS-LL4FT5W-40 | IBS-LL8FT5W-40 |
|-----------------------|------------------------------|----------------|
| Power (W) | 60W | 120W |
| PF | 0.95@120V; | |
| Input Voltage (V) | 120-277VAC | |
| Efficacy (lm/W) | 130lm/W | |
| Lumen output | 2000lm/ft | |
| CCT (K) | 4000K | |
| Dimming | 1-10V | |
| CRI | >80 | |
| Beam angle | 120° | |
| Material | Aluminum+ PMMA | |
| Operating Temperature | -20°C to 40°C/-40°F to 104°F | |
| Humidity | 10% - 90%, | |
| Installation | Suspended Surface mounted | |
| Connection | “+” “L” “T” | |
| Certification | UL/DLC comply | |
| Environment | Indoor Damp Location | |
| Warranty | 5 Years | |
| Product size (L*W*H) | 48"*5"*3.15" | 96"*5"*3.15" |

Notes: Efficacy is 10% lower for CCT below 4000K.



5. Photometric Data

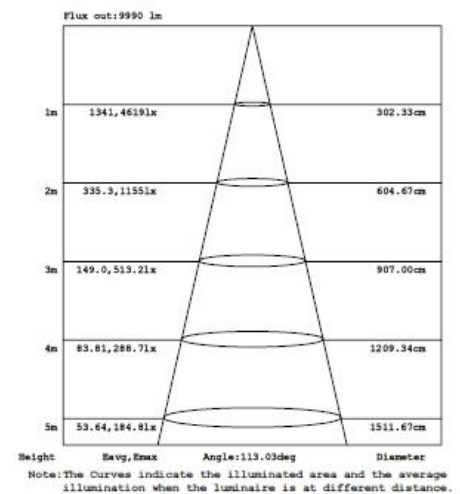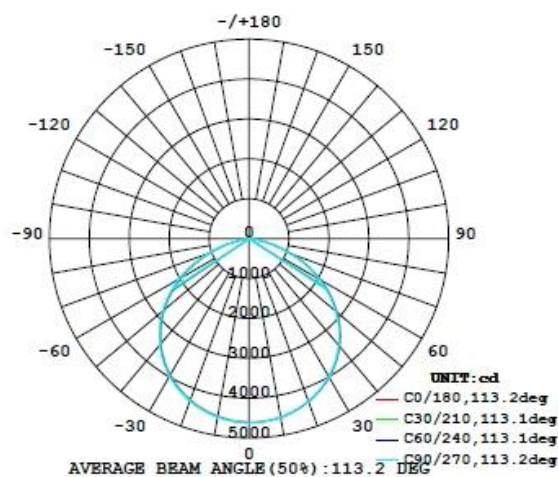




6. Installations:

6.1 Suspended Installation

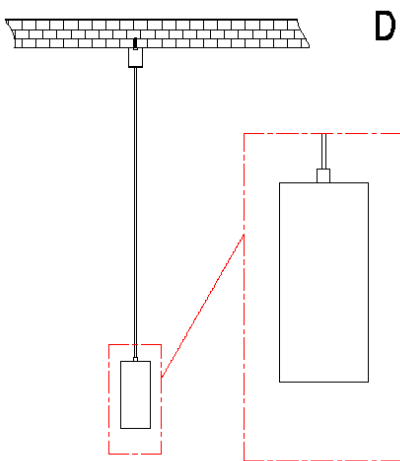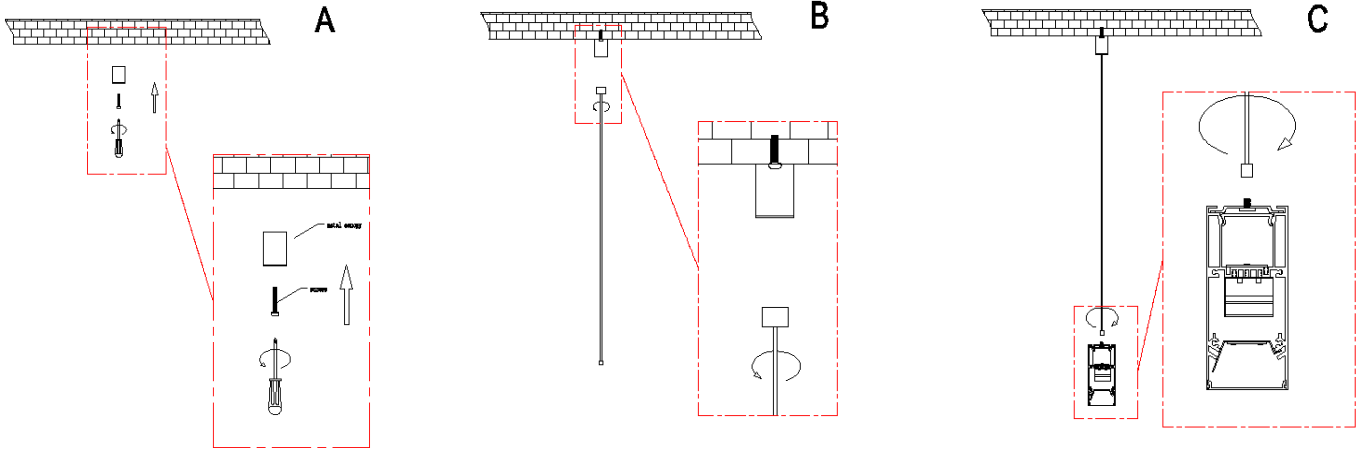

B. connect suspending kit and metal canopy as clockwise

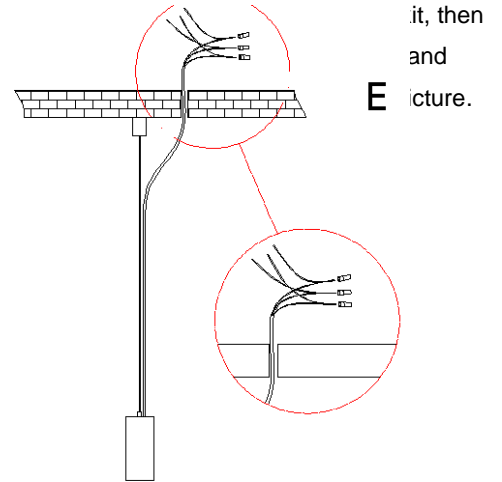

it, then and picture. E




D. finished body as picture

E. finished wire connection as picture.

NOTE: For more installation information, please refer to the installation manual shipped with the fixture



7. Accessories

| Photo | Description | quantity |
|---|---------------------|----------|
|  A 3D rendering of a cross-shaped metal connector with four arms extending from a central square base. | “+”shape connector | 1 |
|  A 3D rendering of a T-shaped metal connector with a long horizontal base and a shorter vertical stem. | “T”shape connector | 1 |
|  A 3D rendering of an L-shaped metal connector with two perpendicular arms of equal length. | “L” shape connector | 1 |